

**APPLICATION** - A recessed mounted 1 x 1 fixture designed for use in protected outdoor or indoor environments where the potential for vandalism or accidental breakage exists. Ideally suited for public housing, psychiatric institutions, correctional facilities, schools or spaces where a rugged indestructible fixture is required.

**HOUSING** - Die formed 20 GA CRS with white polyester powder coated finish.

**TRIM FRAME** - Die formed 16 GA CRS. with white polyester powder coated finish.

**DOOR FRAME** - Die cast aluminum with captive tamper proof spanner head screws.

**LENS** - Lamp side up to .187" thick K-12 acrylic, task side up to .375" thick clear polycarbonate.

**HINGE**: Continuous 16 GA piano hinge welded to door frame and bolted to back pan every six inches.

**BALLAST** - Solid state electronic.

**PHOTOMETRICS** - Please visit our web site at [www.lsi-industries.com](http://www.lsi-industries.com) for detailed photometric data.


**SOCKETS** - Snap in type for compact fluorescent lamps.

**LISTING** - UL Listed to U.S. and Canadian safety standards. Suitable for damp locations. IBEW Union made in the U.S.A.

**FASTENERS** - Spanner head tamper-proof screws are shipped standard. Other head types available (see options).



**DIMENSIONS**

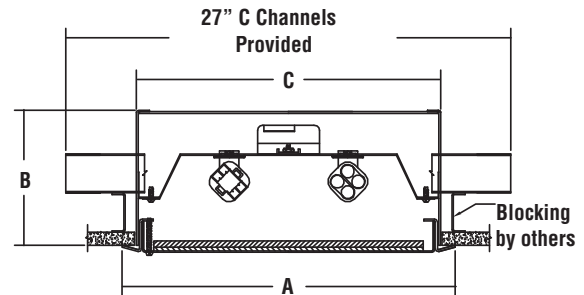

Fixture	Trim Width (A)	Height (B)	Housing Width (C)	Rough In
129	13" SQ.(330mm)	5-1/2" (140mm)	11-3/4" SQ. (298mm)	12" SQ. (305mm)

## LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LI129 F 1 42T 10/5 F UE**

Prefix	Mounting	Lamps	Lamp Type	Lens Combination		Options	Voltage
LI129	F - Flange	1 2	13Q - 13W Quad 18Q - 18W Quad 26Q - 26W Quad 26T - 26W Triple 32T - 32W Triple 42T - 42W Triple	LAMP SIDE 10 - .125 K-12 Prismatic Polycarbonate 20 - .125 K-12 Prismatic Acrylic 30 - .156 K-19 Prismatic Acrylic 50 - .187 K-12 Prismatic Acrylic 60 - .187 K-12 Prismatic Polycarbonate 70 - .187 K-19 Prismatic Acrylic	TASK SIDE 5 - .187 Clear Polycarbonate 15 - .250 Clear Polycarbonate 25 - .375 Clear Polycarbonate  Consult factory for glass options	CH - Clutch Head CPA - Center Pin Allen Head TORX - Torx Head F - Fusing EM - Emergency Pack 27C - 27" C-Channel Bar-Hanger 50C - 52" C-Channel Bar-Hanger	UE - Universal Electronic (120-277V) 120 - 120V 277 - 277V 347 - 347V