

SHALLOW LENSED SURFACE MOUNT (2X4, 1X4)

1S / 2S

PRODUCT HIGHLIGHTS

- Shallow 3-5/16" depth
- Heavy-gauge, steel door frame with cam-action latch and T-hinges standard, extruded aluminum door frame with spring-loaded latching and T-hinges optional (regressed or flat)
- Door frames insertable from either side
- Welded housing prevents light leakage

CONSTRUCTION - Fixture housing, lampholder brackets, end sections and channel cover constructed of code-gauge steel.

ELECTRICAL - All devices UL/CUL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are energy saving solid-state electronic or electromagnetic as selected. Ballasts and lampholders replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex. Where lamps are included as part of the fixture, lamp CRI and color temperature must be specified.

FINISH - All metal parts painted after fabrication following treatment with phosphate rust inhibitor. Finish coating of housing reflecting surfaces is with white, high reflectance (minimum 92%) polyester powder.


PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.

ADDITIONAL SIZES - 4 x 4 also available. Consult factory.


ADDITIONAL OPTIONS - Styrene silver, small cell parabolic and other shielding material available. Consult factory.



DIMENSIONS



1X4

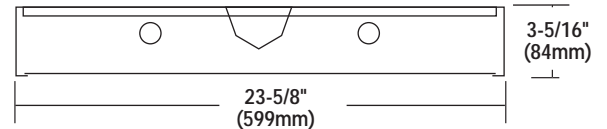

2X4

LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LI1S PAX 2 32 SD SS010 EM UE**

Prefix	Shielding	Lamps	Lamp Type	Doors	Ballasts	Options	Voltage
LI1S (1x4)	PAX - Pattern 12 Acrylic	1	32 - T8 - 32W 48"	SD - Steel door	SS5 - T5 Instant Start	F - Fusing	120 - 120V
	PA125X - Pattern 12 Acrylic .125	2	34 - T12 - 40W 48"	SL - Steel door	SS5R - T5 Rapid Start	EM - Emergency Pack	277 - 277V
		3	28 - T5 - 28W 45"	Spring-loaded Latch	SS5HO - T5 High Output	EMDL - Emergency Pack	347 - 347V
LI2S (2x4)	19X - Pattern 19 Acrylic	2	54 - T5 - 54W 45"	RA - Regressed Aluminum door	SSOD - T8 Dimming (specify type)	Damp Location	UE -
	15X - Pattern 15 Acrylic	3		FA - Flat Aluminum door	SSOL - T8 Low Watt	TP - Tamper Proof door frame	Universal Electronic
	SPWX - Styrene silver 1/2" cell	4			SSOHL - T8 High Power Factor	WG - Wire Guard (SD door only)	Electronic
	SPVX - Styrene silver 1-1/2" cell				SSOR - T8 Rapid Start	LM - Lamps Installed (specify type)	(120-277V)
	(others available upon request)				SSO10 - T8 <10% THD Instant Start		
					SS12 - T12 Electronic		
					(For dual ballasts add "2" Example: SS02)		