

6" HORIZONTAL FLUORESCENT - OPEN WALL WASH

206HCFLWW

PRODUCT HIGHLIGHTS

- Premium quality open reflector with a semi specular wall wash insert.
- .050" spun aluminum reflector available in low-iridescent Alzak® or painted finishes. White self-trim flange.
- Horizontal orientation provides asymmetrical beam spread for even wall illumination.
- Computer-aided design optimizes visual comfort, efficiency and distribution.


CONSTRUCTION - Frame-in housing constructed of galvanized heavy gauge steel with adjustable yoke to retain reflector. Socket housing made of die formed galvanized steel.

ELECTRICAL - Ballasts are Class P, solid state electronic, universal voltage (120V thru 277V) with end-of-life shutdown protection.

MOUNTING - Minimized overall housing dimensions simplify installation and access to junction box. Butterfly brackets accept 27" or 52" C-Channels, nailer bars or EMT conduit. Accommodates ceilings up to 2" thick.

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.


LISTING - UL listed to U.S. and Canadian safety standards. Non-IC rated. Suitable for damp locations. Listed for use with thru wiring. IBEW Union made in the U.S.A.

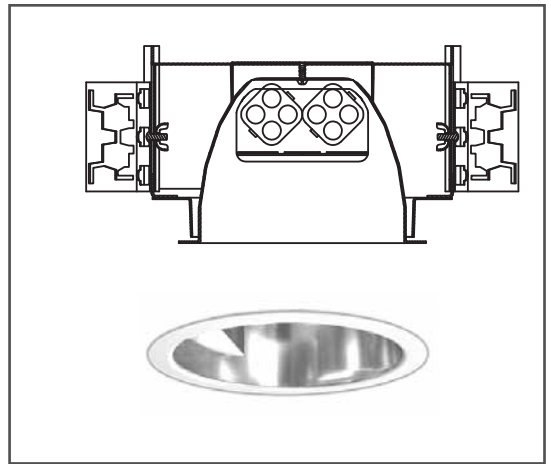

Alzak® is a registered trademark of the Aluminum Company of America.



DIMENSIONS ROUGH IN: 6-3/8" (162mm)

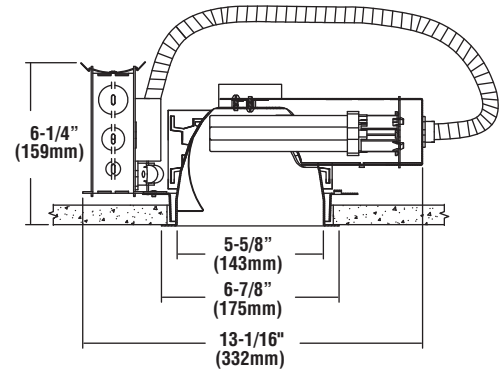

206H 226W Open Wall Wash
3' out from wall
3' on center

1'	4	5	4	4	5	4
2'	20	22	22	22	22	20
3'	27	27	29	29	27	27
4'	23	22	24	24	22	23
5'	17	17	19	19	17	17
6'	14	13	13	13	13	14
7'	10	11	11	11	11	10
8'	8	8	8	8	8	8
	0'	1'	2'	3'		

LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LI206H CFL 1 32T UNIV EB C27**

Luminaire Prefix	Light Source	Lamp Quantity	Rated Wattage	Line Voltage	Options	Field Installed Accessories
LI206H	CFL - Compact Fluorescent	1 or 2 1 or 2 1 1 1 1 1	13 Q 18 Q 26 Q 13 T 18 T 26 T 32 T 42 T	UNIV - Universal	DB - Dimming Ballast* EB - Emergency Battery Pack EBHL - Emergency Battery Pack High Lumen FUS - Fuse 347 - 347 Volt Operation	C27 - 27" Channel Bars (pair) C52 - 52" Channel Bars (pair) NB - Nailer Bar Kit (set of 4) SCIK - Suspended Ceiling Installation Kit (set of 4 bars and 4 grid clips)

* See Price Guide for available dimming ballasts

TYPICAL ORDER EXAMPLE: **LI206H CL WW E**

Reflector	Finish	Wall Wash Type	Emergency
LI206H	CL - Clear Semi Specular CM - Clear Matte GD - Champagne Gold Semi Specular WH - White	PR - Pewter Semi Specular WT - Wheat Semi Specular BZ - Bronze Semi Specular	WW (single) DWW (double) E - Emergency indicator / Test Switch Mounting Hole (Use only with EB option)

Alzak® is a registered trademark of the Aluminum Company of America.

06/08/09

© 2009
LSI INDUSTRIES INC.

Project Name _____ Fixture Type _____
Catalog # _____

