

# 6" VERTICAL FLUORESCENT - OPEN WALL WASH

206VCFLWW

## PRODUCT HIGHLIGHTS

- Premium quality open reflector with semi specular wall wash insert.
- .050" spun aluminum reflector available in low-iridescent Alzak® or painted finishes. White self-trim flange.
- Vertical orientation provides asymmetrical beam spread for even wall illumination.
- Computer-aided design optimizes visual comfort, efficiency and distribution.
- Reflector and kicker can be rotated after installation.
- Socket adjustable from below ceiling without tools.


**CONSTRUCTION** - Frame-in housing constructed of galvanized heavy gauge steel. Socket housing made of extruded aluminum.

**ELECTRICAL** - Ballasts are Class P, solid state electronic, universal voltage (120V thru 277V) with end-of-life shutdown protection.

**MOUNTING** - Minimized overall housing dimensions simplify installation and access to junction box. Butterfly brackets accept 27" or 52" C-Channels, nailer bars or EMT conduit. Accommodates ceilings up to 1" thick.

**PHOTOMETRICS** - Please visit our web site at [www.lsi-industries.com](http://www.lsi-industries.com) for detailed photometric data.


**LISTING** - UL listed to U.S. and Canadian safety standards. Non-IC rated. Suitable for damp locations. Listed for use with thru wiring. IBEW Union made in the U.S.A.

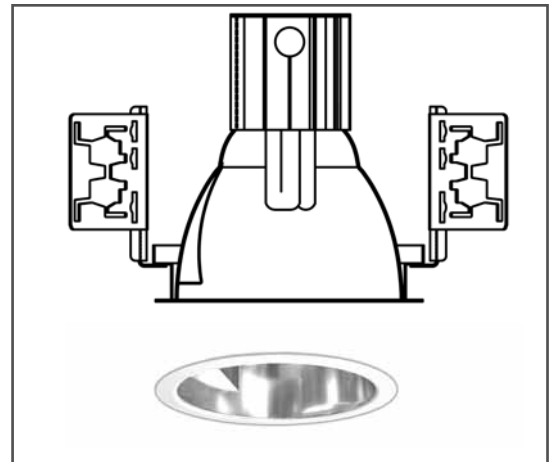

Alzak® is a registered trademark of the Aluminum Company of America.




**DIMENSIONS**      **ROUGH IN: 6-3/8" (162mm)**

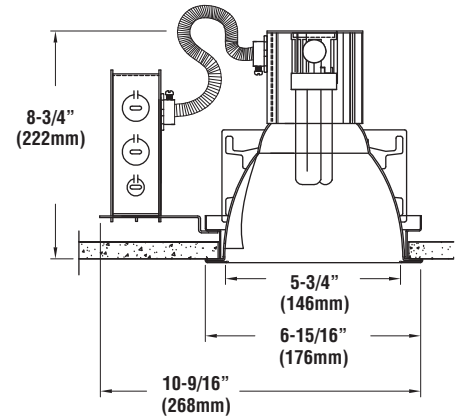

206V 142W Open Wall Wash  
3' out from wall, 3' on center

3' out from wall  
3' OC  
206V 142 open ww

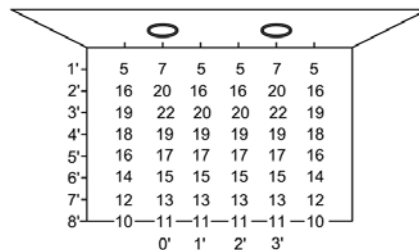

## LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LI206V CFL 1 32T UNIV EB C27**

Luminaire Prefix	Light Source	Lamp Quantity	Rated Wattage	Line Voltage	Options	Field Installed Accessories
LI206V	CFL- Compact Fluorescent	1 1 1 1 1	13 T 18 T 26 T 32 T 42 T	UNIV - Universal	DB - Dimming Ballast* EB - Emergency Battery Pack EBHL - Emergency Battery Pack High Lumen FUS - Fuse 347 - 347 Volt Operation	C27 - 27" Channel Bars (pair) C52 - 52" Channel Bars (pair) NB - Nailer Bar Kit (set of 4) SCIK - Suspended Ceiling Installation Kit (set of 4 bars and 4 grid clips)

\* See Price Guide for available dimming ballasts

TYPICAL ORDER EXAMPLE: **LI206V CL WW E**

Reflector	Finish	Wall Wash Type	Emergency
LI206V	CL - Clear Semi Specular CM - Clear Matte GD - Champagne Gold Semi Specular WH - White	PR - Pewter Semi Specular WT - Wheat Semi Specular BZ - Bronze Semi Specular	WW (single) DWW (double) E - Emergency Indicator / Test Switch Mounting Hole (Use only with EB option)

