

PREMIUM GRADE STATIC (2X2)

2TG

PRODUCT HIGHLIGHTS

- Premium-grade static troffers (heat removal optional)
- 4-1/2" deep housing for excellent lamp to lens spacing/high visual comfort
- Optimum lamp positioning for uniform light diffusion
- Unique matte black light trapping bars eliminate end light spill over
- Integral EQ grid clips

APPLICATION - Recessed grid or flanged troffer.

CONSTRUCTION - Housing/end sections constructed of steel. Wire way covers snap in for easy attachment/removal. Flat, steel door frame with T-hinges and cam-actuated latches available. Flat or regressed, extruded aluminum door frame with spring-loaded latches available (can be inserted from either side).

ELECTRICAL - All devices UL/CUL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are energy saving, solid-state electronic. Ballasts and lampholders replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex. Where lamps are included as part of the fixture, lamp CRI and color temperature must be specified.


FINISH - All metal parts painted after fabrication following treatment with phosphate rust inhibitor. Finish coating of housing reflecting surfaces is with white, high-reflectance (minimum 92%) polyester powder.

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.

ADDITIONAL OPTIONS - Styrene silver, small cell parabolic and other shielding material available. See Shielding Options.



DIMENSIONS

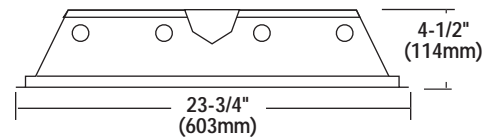

LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LI2T G A 2 U32 SD SSO10 EM UE**

Prefix	Ceiling	Shielding	Lamps	Lamp Type	Doors	Ballasts	Options	Voltage
LI2T (2x2)	G - Grid F - Flanged ¹	A - Pattern 12 Acrylic A125 - Pattern 12 Acrylic .125 19 - Pattern 19 Acrylic (others available upon request)	2 3 4	U32 - T8U - 32W 6" 17 - T8 - 17W 24" U31 - T8U - 31W 1 5/8" 40BX - Biax 40W 50BX - Biax 50W 55BX - Biax 55W	SD - Steel door (with cam latches) RA - Regressed Aluminum door (with spring loaded latches) FA - Flat Aluminum door (with spring loaded latches) HR - Heat Removal	SSB - Biax Instant Start SSBR - Biax Program Rapid Start SSOD - T8 Dimming ² (specify type) SSOL - T8 Low Watt SSOHL - T8 High Power Factor SSOR - T8 Rapid Start SSO10 - T8 <10% THD Instant Start (For dual ballasts add "2" Example: SS02)	F - Fusing EM - Emergency Pack EMDL - Emergency Pack Damp Location FC1 - 6' 3/8" flex, 3 #18 leads (other types available) MA/AUX - Master / Auxiliary LM - Lamps installed (specify) MWA - Specular Aluminum reflector MWS - Specular Silver reflector JP - Job Packed	120 - 120V 277 - 277V 347 - 347V UE - Universal Electronic (120-277V)

FOOTNOTES:

- 1 - See the Flanged Troffer Mounting Data section for details.
- 2 - SSOD not available on U31 lamp option.

06/08/09

© 2009
LSI INDUSTRIES INC.

Project Name _____ Fixture Type _____
Catalog # _____

