



472C

VANDAL RESISTANT CORNER

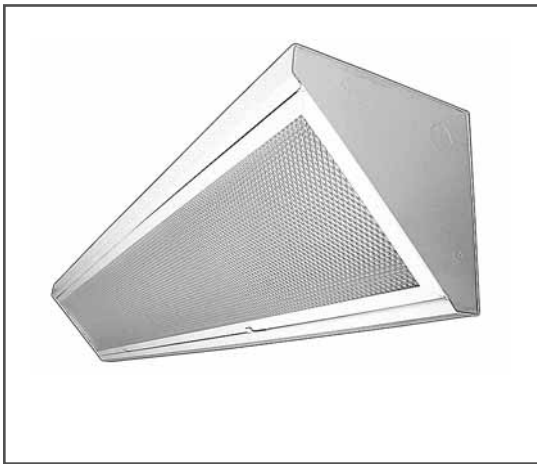

DIMENSIONS

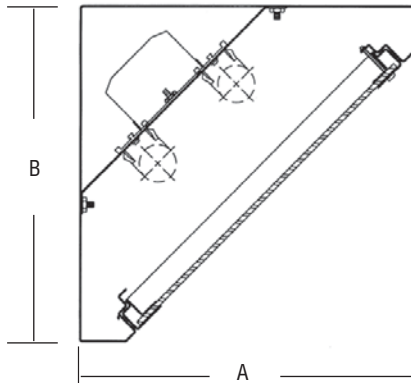

APPLICATION - Series 472C is provided with sturdy 20 gauge crs housings, and are well suited for use in areas where there is a concern for vandalism or accidental breakage. Series 47C in 2' and 4' lengths can be specified for use with biax, T5 and T8 lamps.

HOUSING - Die formed 20 GA CRS. with white polyester powder coated finish.

DOOR FRAME - Die formed 20 GA CRS with mitered and welded corners. Inner frame prevents lens from being forced upward. Door frame is retained by tamper proof spanner head screws opposite T-hinges. White polyester powder coated finish.

SHIELDING - .125" thick low brightness polycarbonate diffuser, (optional shielding available).

BALLAST - Solid state electronic.

LAMPS - Biax, or T8 lamps available (by others).

SOCKETS - Polycarbonate construction.

LISTING - UL Listed to U.S. and Canadian safety standards. Suitable for damp locations. IBEW Union made.

FASTENERS - Spanner head tamper-proof screws are shipped standard. Other head types available (see options).

FIXTURE	W X L (A)	HEIGHT (B)
47C-2'	9" x 25" (229x635mm)	9" (229mm)
47C-4'	9" x 49" (229x1245mm)	9" (229mm)

LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LI472 C 2 17 SSOD DR UE**

Prefix	Mounting	Lamps	Lamp Type	Ballasts	Options	Voltage
LI472	C - Cornice	1 2	40BX - 40W Biax	SSB - Biax Instant Start SSBR - Biax Program Rapid Start SS5 - T5 Instant Start SS5R - T5 Rapid Start SS5D - T5 Dimming (Specify Type) SSOD - T8 Dimming (Specify Type) SSOL - T8 Low Watt SSOHL - T8 High Power Factor SSOR - T8 Rapid Start SSO10 - T8 <10% THD Instant Start	CH - Clutch Head CPA - Center Pin Allen Head TORX - Torx Head F - Fusing EM - Emergency Pack DR - .140 High Impact Acrylic, 50%DR FWA - Flat White Acrylic K12 - .125 Prismatic Acrylic K19 - .156 Prismatic Acrylic K19 .125 - .125 Clear Polycarbonate .250 - .250 Clear Polycarbonate	120 - 120V 277 - 277V 347 - 347V UE - Universal Electronic (120-277V)
			50BX - 50W Biax			
		55BX - 55W Biax				
		17 - 17W 24" T8				
		U31 - 31W 1-5/8" U				
		1 2 3	32 - 32W 48" T8 28 - 28W 45" T5			
1 2	54 - 54W T5 HO					