


EAW


EXTRUDED ACRYLIC WRAPAROUND



DIMENSIONS



EAW6 - 1, 2, & 3 LAMP

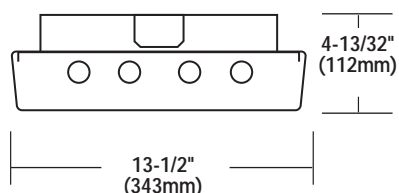

EAW10 - 2, 3, & 4 LAMP

PRODUCT HIGHLIGHTS

- Available in 8" & 13" widths
- Fully embossed, Pattern 12 – .110 thick extruded lens with sonically welded end caps
- Compact shape for widespread distribution
- Positive sealing of lens with spring-loaded latches

CONSTRUCTION - 4' fixture housings constructed of code-gauge, die-formed, cold rolled steel. Tandem units have one-piece, code-gauge, die-formed, cold rolled steel fixture housings for maximum strength/alignment. Ends/socket plates are fastened to housings for rigid construction.

SHIELDING - Fully embossed, Pattern 12 diffuser formulated with impact-resistant resin for added breakage protection. Optional lens configurations available.

ELECTRICAL - All devices UL/CUL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are energy saving solid-state electronic. Ballasts and lampholders replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex.

FINISH - All metal parts painted after fabrication following treatment with phosphate rust inhibitor. Finish coating of housing reflecting surfaces is with white, high reflectance (minimum 92%) polyester powder.

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.



ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LIEAW 6 2 32 SSO10 EM UE**

Prefix	Lamps	Lamp Type	Ballasts	Options	Voltage
LIEAW6	1 2 3'	32 - T8 - 32W 48" 28 - T5 - 28W 46" 54 - T5 - 54W 46"	SSOD - T8 Dimming (specify type) SSOL - T8 Low Watt SSOHL - T8 High PowerFactor SSOR - T8 Rapid Start SSO10 - T8 <10% THD Instant Start SS5D - T5 Dimming (specify type) SS5HO - T5 High Output SS5R - T5 Rapid Start SS5HOD - T5HO Dimming (specify type) (For dual ballasts add "2" Example: SS02)	F - Fusing (GLR) EM - Emergency Pack EMDL - Emergency Pack Damp Location LS - Linear sides, Pattern 12 bottom	120 - 120V 277 - 277V 347 - 347V UE - Universal Electronic (120-277V)
LIEAW10	2 3 4'	Note: For tandem configurations suffix above number with "-2"			

1 - Not available in 54W T5HO