



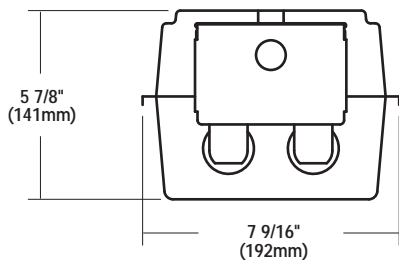

DIMENSIONS

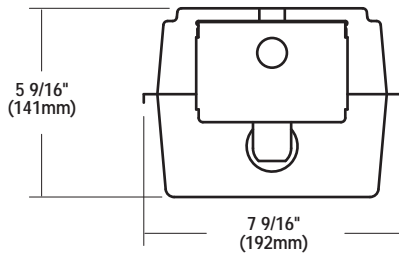

(Deep Lens Dimensions Shown)

PRODUCT HIGHLIGHTS

- Vaportight design
- High-impact resistant, reinforced polyester, fiberglass housing
- Available in 4' & 8' lengths
- Standard diffuser formed with 15% high-impact DR acrylic for strength, secured by 6 (4') or 12 (8') locking latches
- Gasketing is non toxic, fire-retardant, uniform width and thickness for a tight seal
- National Sanitation Foundation and Canadian Standards Association approved and listed.
- Gear tray snaps in for easy ballast access. Tray is retained by a safety tether attached to inside of housing.



CONSTRUCTION - Lampholder brackets, end sections and channel cover constructed of code-gauge, die-formed, steel. Outer housing molded of high-impact, polyester/fiberglass with inner lip bonded with continuous, compressible, closed-cell neoprene gasketing.

ELECTRICAL - All devices UL/CUL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are energy-saving solid-state electronic or electromagnetic. Ballasts and lampholders replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex. Where lamps are included as part of the fixture, lamp CRI and color temperature must be specified.

FINISH-All metal parts painted after fabrication following treatment with phosphate rust inhibitor. Finish coating of housing reflecting surfaces is with white, high reflectance (minimum 92%) polyester powder. Parking garage reflector is 95% high efficiency specular aluminum.

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.

ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LIEG 2 32 SS010 EM UE**

Prefix	Lamps	Lamp Type	Ballasts	Options	Voltage
LIEG	1 2	4 Foot 28 - T5 28W 54 - T5 54W HO 32 - T8 32W 48"	SS5R - T5 Rapid Start SS5HO - T5HO SSOD - T8 Dimming (specify type) SSOL - T8 Low Watt SSOHL - T8 High Power Factor SSOR - T8 Rapid Start SS010 - T8 <10% THD Instant Start SS12 - T12 Electronic M12E - Magnetic Energy Savings	F - Fusing SL - Stainless Steel Latches TP - Tamper resistant Latches & screws WL - UL Listed for Wet Location w/ fitting CD - DR Crepe acrylic diffuser - 50% DR EM - Emergency Pack EMDL - Emergency Pack damp location MB - Stainless Steel Mounting Bracket WDMWS - Wide Distribution Specular Reflector	120 - 120V 277 - 277V 347 - 347V UE - Universal Electronic (120-277V)
	1 2	4 Foot 34 - T12 24W 48" 44HO - T8HO 48" 48 - 48" SL 48HO - T12HO 48"			
Note: For tandem configurations suffix number above with "-2"					

ACCESSORY ORDERING INFORMATION

Description	Order Number
(2) mounting brackets (2) bails & (2) 10' cables	EGAC
(2) mounting brackets (2) bails & (2) 3' jack chains	EGCHSMB
(2) mounting brackets (2) bails & (2) 5' jack chains	EGCHS5MB

