


EG4

ENCLOSED & GASKETED - CURVED LENS



DIMENSIONS

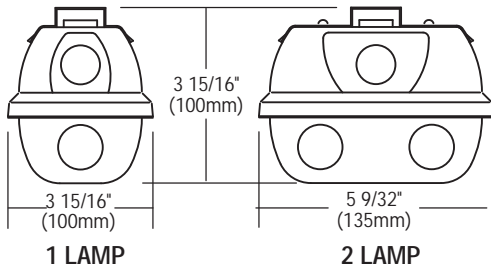

1 LAMP
*Available in 2' and 4' only

2 LAMP

PRODUCT HIGHLIGHTS

- Vaportight design
- High-impact resistant, reinforced fiberglass housing.
- Injection molded polycarbonate lens with lineal ribbing is standard.
- Lens secured to housing with polycarbonate latches. Eight on the 4' and 5' housings, four on the 2' housings.- Gasket is a continuously poured, odor free, non-toxic, fire resistant, uniform width and thickness for a tight seal.
- Gear tray snaps-in for easy ballast access. Tray is retained by a safety tether attached to inside of housing.
- Stainless steel mounting bracket can be mounted to surface where required, housing snaps into bracket easing installation. Brackets accept V-hooks or M6 mini eyebolt for cable suspension.
- National Sanitation Foundation and Canadian Standards Association approved and listed.

CONSTRUCTION - Inner tray of code-gauge, die-formed, steel. Outer housing molded of high-impact, polyester/fiberglass with inner lip bonded with continuous, compressible, closed-cell neoprene gasketing.

ELECTRICAL - All devices UL/CUL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are energy-saving, solid-state electronic. Ballasts and lampholders replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex. Where lamps are included as part of the fixture, lamp CRI and color temperature must be specified.

FINISH - All metal parts painted after fabrication following treatment with phosphate rust inhibitor. Finish coating of housing reflecting surfaces is with white, high reflectance (minimum 92%) polyester powder.

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.



ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LIEG4 1 32 SS010 WL UE**

Prefix	Lamps	Lamp Type	Ballasts	Options	Voltage
LIEG4	1 2	2 Foot 14 - 14 W T5 24 - 24 W HO T5 ¹ 17 - 17 W T8 4 Foot 28 - 28 W T5 54 - 54 W HO T5 ¹ 32 - 32 W T8	SS5 - T5 Instant Start SS5R - T5 Rapid Start SS5D - T5 Dimming (specify type) SS5HO - T5HO SSOD - T8 Dimming (specify type) SSOL - T8 Low Watt SSOHL - T8 High Power Factor SSOR - T8 Rapid Start SS010 - T8 <10% THD Instant Start (For dual ballasts add "2" Example: SS02)	F - Fusing RIF-1 - Radio interference filter WL - U.L. Listed for Wet Location w/ fitting EM - Emergency Pack EMDL - Emergency Pack damp location WDMWS - Wide Distribution Specular Reflector	120 - 120V 277 - 277V 347 - 347V UE - Universal Electronic (120-277V)

1- Available in 2 lamp version only.

ACCESSORY ORDERING INFORMATION

Description	Order Number
(2) snap-on bails & (2) 10' aircraft cables	EG34AC
(2) snap-on bails & (2) 3' jack chains	EGCHS
(2) snap-on bails & (2) 5' jack chains	EGCHS5

06/08/09

© 2009
LSI INDUSTRIES INC.

Project Name _____ Fixture Type _____

Catalog # _____

