

HIGH EFFICIENCY T8 TROFFER - STATIC

GA

PRODUCT HIGHLIGHTS

- Optimized for T8 lamp performance
- Computer-aided housing design allows for optimum luminaire efficiency.
- Cam action latches and die formed T-hinges for door insertion from either side.
- Die-formed flat steel door with mitered look corners for clean appearance
- 3 1/4" deep housing with hemmed edges on sides for safe handling
- Integral EQ grid clips

CONSTRUCTION - Housing constructed of structurally embossed, heavy gauge, cold rolled steel. Wire way covers snap in for easy attachment and removal. Access plate provides top access to wire way.

ELECTRICAL - All devices UL/CUL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lampholders replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex. Where lamps are included as part of the fixture, lamp CRI and color temperature must be specified.


FINISH - All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

FLANGE KIT - This fixture is not available as a flanged fixture, Use either an FK-24 flange kit to mount in a sheet rock ceiling.

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.



DIMENSIONS

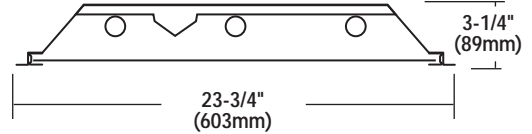

LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LIG A 2 32 SD SS010 EM UE**

Prefix	Shielding	Lamps	Lamp Type	Doors	Ballasts	Options	Voltage
LIG	A - Pattern 12 Acrylic A125 - Pattern 12 Acrylic .125 19 - Pattern 19 Acrylic (others available upon request)	2 3 4	32 - 32W 48" T8 28 - 28W 45" T5 54 - 54W 45" T5HO	SD - Steel door (with cam latches) SL - Steel door Spring Loaded Latches RA - Regressed Aluminum door (with spring loaded latches) FA - Flat Aluminum door (with spring loaded latches)	SS5D - T5 Dimming (specify type) SS0D - T8 Dimming (specify type) SSOL - T8 Low Watt SSOHL - T8 High Power Factor SSOR - T8 Rapid Start SSO10 - T8 <10% THD Instant Start SS5R - T5 Rapid Start SS5HO - T5 HO (For dual ballasts add "2" Example: SS02) (small can only)	F - Fusing FC1 - 6' 3/8" flex, 3 #18 leads (other types available) MA/AUX - Master / Auxiliary PAF - Painted after fabrication JP - Job packed without cartons LM - Lamps installed (specify) EM - Emergency Pack (Small can only) EMDL - Emergency Pack Damp Location WG - Wireguard (SD door only)	120 - 120V 277 - 277V 347 - 347V UE - Universal Electronic (120-277V)

ACCESSORY ORDERING INFORMATION (Accessories are field installed)	
Description	Order Number
Flange Kit - 2x4	FK24