

# IMX NB

# NARROW AISLE HIGHBAY



### SPECIFICATIONS

- High efficiency T5 lamps for significant energy savings over HID high bays.
- Designed to replace 250 through 750 Watt MH fixtures.
- Unit may be pendant, chain, aircraft
- Monopoint mounting option (MMS) allows single-point mount for direct replacement of HID High Bays
- Shallow fixture depth 3-3/4"
- Minimum fixture weight - less load on building structure

**CONSTRUCTION** - Fixture housing, end sections, and lampholders of code gauge die formed steel, standard reflector of code gauge die formed aluminum, MIRO 4 finish.

**ELECTRICAL** - All devices UL/CUL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are energy-saving, HPF, CBM, Class P electronic. Ballasts and lampholders replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex. Where lamps are included as part of the fixture, lamp CRI and color temperature must be specified.

**FINISH** - All steel parts are finished with high reflectance, white polyester powder.



**BALLAST** - Comply with Class P HPF, Non PLB. Sound rated A.

**MOUNTING** - Aircraft Cable, Chain, Pendant Mount, or Surface Mount.

**LAMPS** - Factory installed lamps are available in various CRI, Kelvin temperatures, and rated life. Specify type when ordering.

**PHOTOMETRICS** - Please visit our web site at [www.lsi-industries.com](http://www.lsi-industries.com) for detailed photometric data.

### DIMENSIONS

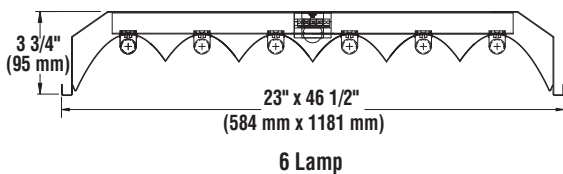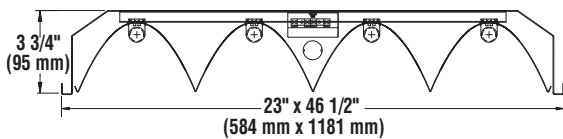

### LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LIIMXNB 4 54 SS5HO EM MMS UE**

Prefix	Lamps	Lamp Type	Ballasts	Options	Mounting Options	Voltage
LIIMXNB	4 6	54 - 54W 46" T5 HO	SS5HO - T5HO SS5HOD - T5HO Dimming (specify type)	F - Fusing EM - Emergency Pack EMDL - Emergency Pack Damp Location OCS - Occupancy Sensor WHT - White Reflector LM - Lamps Installed (specify type)	For Cable and Chain Suspension Kits, see Fluorescent Highbay Accessories Pages MMS - Monopoint Mounting System	120 - 120V 277 - 277V 347 - 347V UE - Universal Electronic (120-277V)

ACCESSORY ORDERING INFORMATION (Accessories are field installed)	
Description	Order Number
Wire Guard	WG-IMX
Clear Acrylic Lens Door Assembly	PAX-C
SEE FLUORESCENT HIGHBAY ACCESSORIES PAGE	