

APPLICATION - Designed for individual or continuous mounting, Series 99 provides a 6" x 6" cross section with unusual versatility. Luminaires may be surface, grid, flange, wall, pendant, or aircraft cable supported. A wide variety of lamp choices are available and may be coordinated with a broad selection of diffuser and louver combinations, including a parabolic cross baffle. Series 99 luminaires are available in 2', 3', 4', 6', or 8' lengths. Continuous row mounted fixtures and corner connectors are provided for precise fit and appearance.

HOUSING - Die formed cold rolled steel with double thick welded corner construction. Textured white polyester powder coated finish standard.

REFLECTOR - Die formed steel, white polyester powder coat finish. Specular reflector optionally available.

SHIELDING - 1" high x 1" on center cross baffle. White polyester powder coated finish standard. Optional shielding available.


BALLAST - Solid state electronic, 120V thru 277V.

SOCKET - Polycarbonate locking socket.


LAMPS - T5 or T8 lamps (by others).

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.

LISTING - UL listed to U.S. and Canadian safety standards. Suitable for damp location. IBEW Union made in the U.S.A.

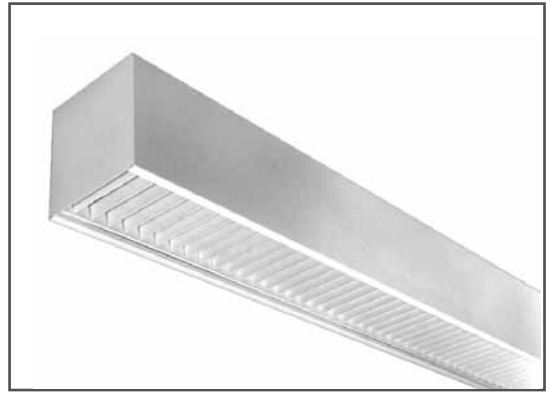

DIMENSIONS

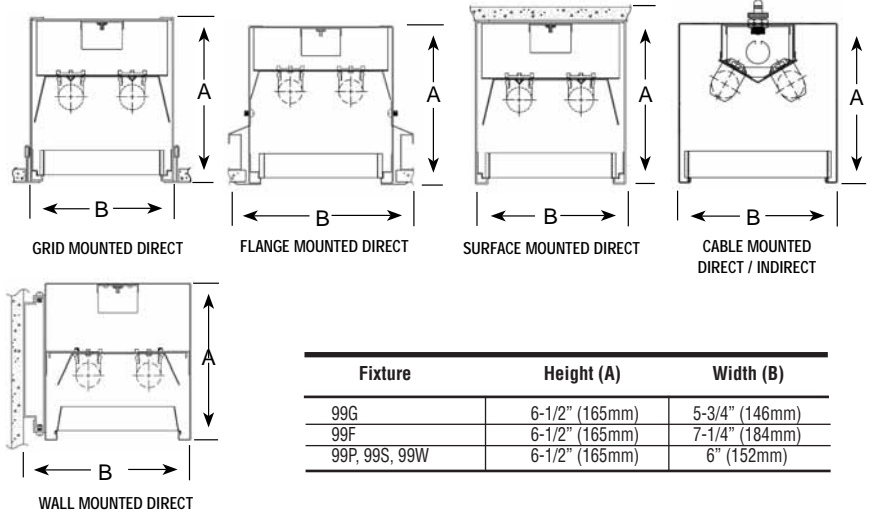

Fixture	Height (A)	Width (B)
99G	6-1/2" (165mm)	5-3/4" (146mm)
99F	6-1/2" (165mm)	7-1/4" (184mm)
99P, 99S, 99W	6-1/2" (165mm)	6" (152mm)

LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LI99 D F 2 WCB 1 32 SS010 W F UE**

Prefix	Distribution	Mounting	Length	Shielding	Lamps in Cross Section	Lamp Type	Ballasts	Reflector	Options	Voltage
LI99	D - Direct	S - Surface G - Grid F - Flanged W - Wall PMK - Pendant ¹ ACK4 - 4' Aircraft Cable ² ACK8 - 8' Aircraft Cable ²	2 - 2ft. 4 - 4ft. 8 - 8ft.	WCB - White Cross Baffle SPN - 1/2"x1/2" Paracube Lens SPV - 1-1/2" X 1-1/2" Paracube Lens PI - 1-3/8" Deep Louver 2" O.C. A.125 - Acrylic .125 Lens	1 2	28 - 28W T5 54 - 54W T5 HO 32 - 32W T8 17 - 17W T8	SS010 - T8 Instant Start SSOD - T8 Dimming (Specify Type) SSOL - T8 Low Power Factor SSOHL - T8 High Power Factor SS5R - T5 Rapid Start SS5HO - T5 High Output	W - White MWS - Specular Silver	CC - Custom Color (Supply paint chip) ³ CAN5 - Canopy for Non-Feed ACK ⁴ F - Fusing EM - Emergency Pack	120 - 120V 277 - 277V 347 - 347V UE - Universal Electronic (120-277V)
		WCB - White Cross Baffle (Direct-down Only) SPN - 1/2"x1/2" Paracube Lens (Direct-down Only) SPV - 1-1/2" X 1-1/2" Paracube Lens (Direct-down Only) PI - 1-3/8" Deep Louver 2" O.C. (Direct-down Only) A.125 - Acrylic .125 Lens O - Opal Acrylic (Up Only)								
	DI - Direct / Indirect	W - Wall PMK - Pendant ¹ ACK4 - 4' Aircraft Cable ² ACK8 - 8' Aircraft Cable ²								
	COR - Corner Unit (Non-illuminated) ⁶	W - Wall G - Grid F - Flange PMK - Pendant ACK4 - 4' Aircraft Cable ² ACK8 - 8' Aircraft Cable ²		(Consult Factory)						

FOOTNOTES:

1- Specify pendant length in inches (example pmk-18= 18" stem length)
2- Includes 5" canopy for feed

3- Consult factory for details
4- Canopy for nonfeed ack kits

5- Consult factory for dimensions

