



LLS

RECESSED DIRECT/INDIRECT - SIDE DISTRIBUTION (2X2)

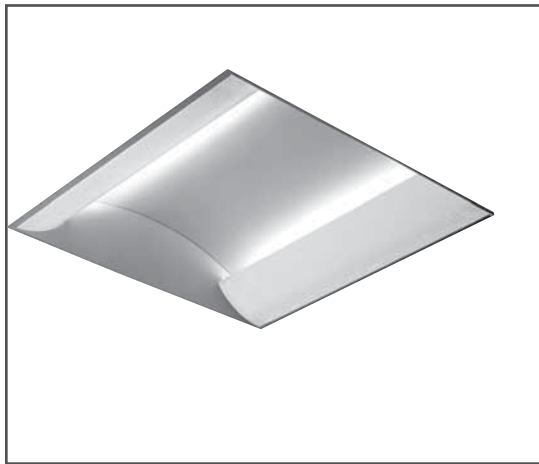

DIMENSIONS

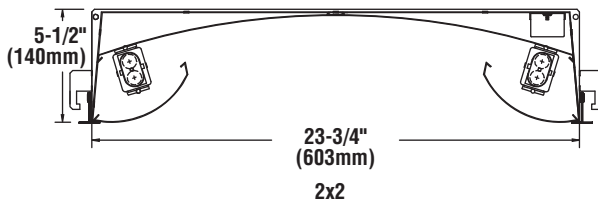

PRODUCT HIGHLIGHTS

- Direct/indirect unit with balanced illumination and superior low angle brightness control
- Combines architectural appeal with ease of lay-in installation
- Curved metal shield with perforated, round holes eliminates glare and veiling reflections directly below fixture. Optional shielding listed below
- White or metallic silver shields available
- Easy access to lamps with lift and shift design
- Matte white reflectors for soft, indirect light distribution
- Integral EQ grid clips

CONSTRUCTION - Housing/end sections, die-formed, cold rolled steel. Reflectors held in place with integral housing pins. Reflector provided with tool-less removal for access to ballasts and wiring.

ELECTRICAL - All devices UL and CUL listed. All ballasts are solid-state electronic as selected. Ballasts/lampholders replaceable without removing fixture from ceiling.

FINISH - All reflective surfaces finished with matte white, highly reflective (minimum 92%), polyester powder.

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.



ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LI2LLS G 2 40BX RPW SSB EM 120**

Prefix	Ceiling	Lamps	Lamp Types	Shield	Ballasts	Options	Voltage
LI2LLS (2x2)	G - Grid	2 4	14 - 14W T5 22" 24HO - 24W T5HO 22" 17 - 17W T8 24"	RPW - Round perforated white shield (includes white diffuser overlay)	SS5 - T5 Instant Start SSB - Biax Instant Start SS5R - T5 Rapid Start SS5D - T5 Dimming (Specify type) SS5HO - T5HO SSOD - T8 Dimming (Specify type) SSOL - T8 Low Watt SSOHL - T8 High Power Factor SSOR - T8 Rapid Start SSO10 - T8 <10% THD Instant Start SSBR - Biax Program Rapid Start (For dual ballasts add "2" Example: SS02)	EM - Emergency Pack EMDL - Emergency Pack Damp Location F - Fusing FC1 - 6' 3/8" flex, 3 #18 leads (other types available) MA/AUX - Master Auxiliary SAR - Stepped Aluminum Reflector	120 - 120V 277 - 277V 347 - 347V UE - Universal Electronic (120-277V)
		2	Biax Lamps 40BX - 40W 50BX - 50W 55BX - 55W				

ACCESSORY ORDERING INFORMATION (Accessories are field installed)	
Description	Order Number
Flange Kit - 2x2	FK22