

# RECESSED DIRECT/INDIRECT - SIDE DISTRIBUTION (1X4, 2X4)

LLS

## PRODUCT HIGHLIGHTS


- Direct/indirect unit with balanced illumination and superior low angle brightness control
- Combines architectural appeal with ease of lay-in installation
- Curved metal shield with perforated, round holes eliminates glare and veiling reflections directly below fixture. Optional shielding listed below
- White or metallic silver shields available
- Easy access to lamps with lift and shift design
- Matte white reflectors for soft, indirect light distribution
- Integral EQ grid clips

**CONSTRUCTION** - Housing/end sections, die-formed, cold rolled steel. Reflectors held in place with integral housing pins. Reflector provided with tool-less removal for access to ballasts and wiring.



**ELECTRICAL** - All devices UL and CUL listed. Where applicable, ballasts are solid-state electronic. Ballasts/lampholders replaceable without removing fixture from ceiling.

**FINISH** - All metal parts painted after fabrication following treatment with phosphate rust inhibitor. Finish coating of housing reflecting surfaces is with matte white, polyester powder.

**PHOTOMETRICS** - Please visit our web site at [www.lsi-industries.com](http://www.lsi-industries.com) for detailed photometric data.

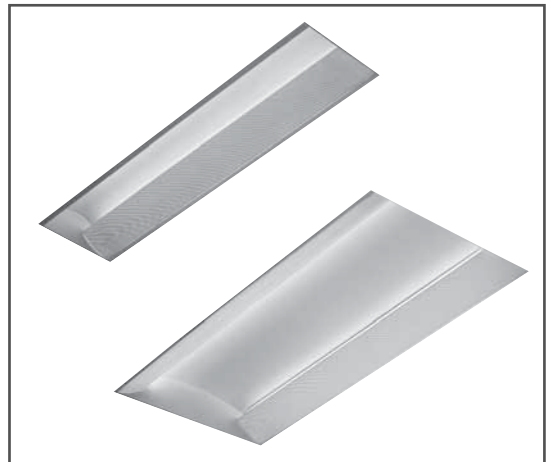

### DIMENSIONS

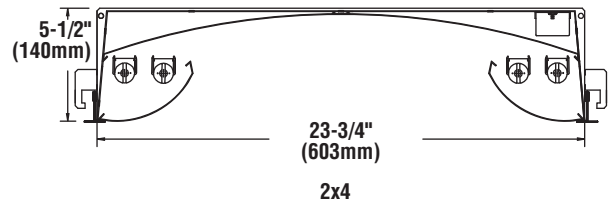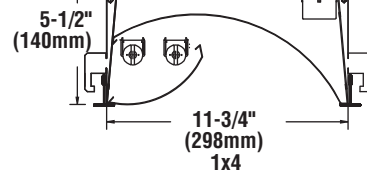

## ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LI1LLS G 2 32 RPW SS010 EM UE**

Prefix	Ceiling	Lamps	Lamp Types	Shield	Ballasts	Options	Voltage
LI1LLS (1x4)	G - Grid	1	28 - 28W T5 45°	RPW - Round perforated white shield (Includes white diffuser overlay)	SS5 - T5 Instant Start SS5R - T5 Rapid Start SS5D - T5 Dimming (Specify type) SS5HO - T5HO SSOD - T8 Dimming (Specify type) SSOL - T8 Low Watt SSOHL - T8 High Power Factor SSOR - T8 Rapid Start SSO10 - T8 <10% THD Instant Start  (For dual ballasts add "2" Example: SS02)	EM - Emergency Pack EMDL - Emergency Pack Damp Location F - Fusing FC1 - 6' 3/8" flex, 3 #18 leads (other types available) MA/AUX - Master Auxiliary SAR - Stepped Aluminum Reflector	120 - 120V 277 - 277V 347 - 347V UE - Universal Electronic (120-277V)
LI2LLS (2x4)		2 4	32 - 32W T8 48° 54 - 54W T5HO 45°				

### ACCESSORY ORDERING INFORMATION (Accessories are field installed)

Description	Order Number	Description	Order Number
Flange Kit - 1x4	FK14	Flange Kit - 2x4	FK24

06/08/09

© 2009  
LSI INDUSTRIES INC.

Project Name \_\_\_\_\_ Fixture Type \_\_\_\_\_

Catalog # \_\_\_\_\_

