


DIMENSIONS

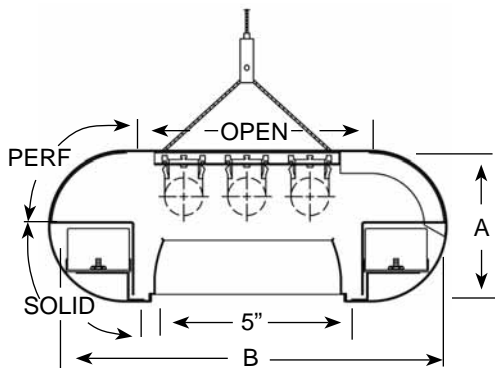

APPLICATION - An elegant combination of perforated and traditional parabolic design blended into a soft oval cross section. The indirect component is further diffused by a white acrylic liner. Designed for use with T8 lamps, in individual or continuous mounting styles. See chart for lamp choices and options.

HOUSING - Die formed cold rolled steel, top quadrant is perforated 46% open aperture. Textured white polyester powder coated finish. Ends welded and ground smooth.

REFLECTOR - Die formed steel, white polyester powder coat finish.

DIFFUSER - Molded opal white acrylic - 60% transmission.

SHIELDING - Die formed parabolic .025 semi-specular aluminum.

BALLAST - Solid state electronic, 120V thru 277V.

MOUNTING - Specify pendant mount kit, or aircraft cable kit supplied with adjustable hanger.

SOCKET - Polycarbonate locking socket.

LAMPS - T8 lamps (by others).

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.

LISTING - UL listed to U.S. and Canadian safety standards. Suitable for damp location. IBEW Union made in the U.S.A.

Fixture	Height (A)	Width (B)	Length (C)
330-4'	4" (102mm)	10-1/2" (267mm)	48" (1219mm)
330-8'	4" (102mm)	10-1/2" (267mm)	96" (2438mm)

LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **L1330 ACK4 4 2 32 SSOR F UE**

Prefix	Mounting	Length	Lamps in Cross Section	Lamp Type	Ballasts	Options	Voltage
L1330	PMK4 - 4' Pendant Mount Kit ACK4' - 4' Aircraft Cable ACK8' - 8' Aircraft Cable	4 8	2 3	32 - 32W T8	SSOD - T8 Dimming (Specify Type) SSOL - T8 Low Watt SSOHL - T8 High Power Factor SSOR - T8 Rapid Start SSO10 - T8 <10% THD Instant Start	CAN52 - 5" canopy for non-feed ACK. CC - Custom Color (Supply paint chip) F - Fusing EM3 - Emergency Pack PM - Prewired Plug-in Assembly (specify circuitry)	120 - 120V 277 - 277V 347 - 347V UE - Universal Electronic (120-277V)

FOOTNOTES:

- 1- Specify dimming type and voltage.
- 2- Can only be used with programmed start ballast.

PROVIDE ROW INFORMATION AS REQUIRED