

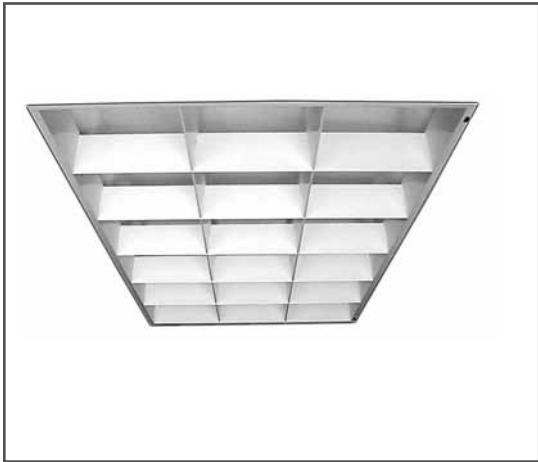


PBNR

NO REVEAL (1X4, 2X4)

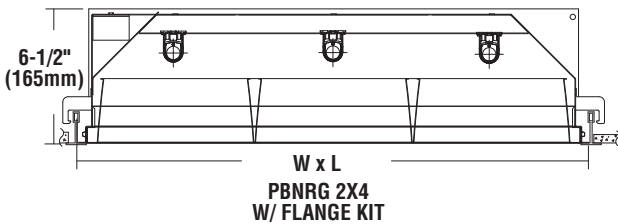

DIMENSIONS

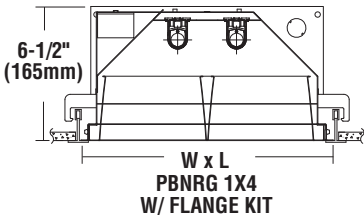

PRODUCT HIGHLIGHTS

- Provides an uninterrupted reveal free appearance between ceiling and luminaire.
- Larger cell openings and elimination of perimeter silhouette offer high efficiency and greater design and performance choices.

CONSTRUCTION - The housing and reflector are die-formed cold-rolled steel. 96% specular reflector optionally available.

SHIELDING - 3" deep parabolic louver fabricated of semi-specular aluminum. White finish available. Louver may be hinged and latched from either side.

ELECTRICAL

-All devices UL/CUL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are energy-saving, solid-state electronic. Ballasts and lampholders replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex. Where lamps are included as part of the fixture, lamp CRI and color temperature must be specified.

MOUNTING - Integral EQ Grid Clips.

FINISH - All metal parts painted after fabrication following treatment with phosphate rust inhibitor. Finish coating of housing reflecting surfaces is with white, high reflectance (minimum 92%) polyester powder.

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.

LISTING - UL Listed to U.S. and Canadian safety standards. IBEW Union made.

Size	W x L	PBG Flange Kit	Flange Kit Rough in
1x4	11-3/4"(298mm) x 47-3/4"(1213mm)	12-7/8"(327mm) x 50"(1241mm)	12"(305mm) x 48-1/4"(1222mm)
2x4	23-3/4"(603mm) x 47-3/4"(1213mm)	24-7/8"(632mm) x 50"(1241mm)	24"(610mm) x 48-1/4"(1232mm)

LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LIPBNR2 G 16 2 32 SS010 EM UE**

Prefix	Ceiling	Cells	Lamps	Lamp Type	Ballasts	Options	Voltage
LIPBNR1 (1x4)	G - Grid	6	2	32 - 32W 48" T8	SSOD - T8 Dimming [†] (specify type) SSOL - T8 Low Watt SSOHL - T8 High Power Factor SSOR - T8 Rapid Start SSO10 - T8 <10% THD Instant Start (For dual ballasts add "2" Example: SS02)	F - Fusing EM - Emergency Pack EMDL - Emergency Pack Damp Location HTO - High Transmission Overlay MA/AUX - Master/Auxiliary MWA - Specular Aluminum Reflector W - White Louver	120 - 120V
		8	3				277 - 277V
LIPBNR2 (2x4)		12	2				347 - 347V
		18	3				UE -
		24	4				Universal
		32					Electronic (120-277V)

ACCESSORY ORDERING INFORMATION (Accessories are field installed)

Description	Order Number
Flange Kit - 2x4	FK24
Flange Kit - 1x4	FK14