

HIGH EFFICIENCY T8 PARABOLIC (2X4)

PGN/PSN

PRODUCT HIGHLIGHTS


- Nominal 3" deep louver computer designed for excellent cut-off and glare control of T8 lamps
- Cost effective visual comfort for general office environments
- Aluminum louver surfaces plated with anodized, semi-specular aluminum, low iridescent finish
- Spring-loaded latches and die formed T-hinges for louver insertion from either side
- Floating door with black reveal standard, multiple air functions available
- Removable louver seal eliminates dust build-up and protects lamps during construction and installation
- Integral EQ grid clips

CONSTRUCTION - Housing constructed of structurally embossed, heavy gauge, cold rolled steel. Wire way covers snap in for easy attachment and removal. Access plate provides top access to wire way


ELECTRICAL - All devices UL/CUL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are energy-saving, solid-state electronic. Ballasts and lampholders replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex. Where lamps are included as part of the fixture, lamp CRI and color temperature must be specified.

FINISH - All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.

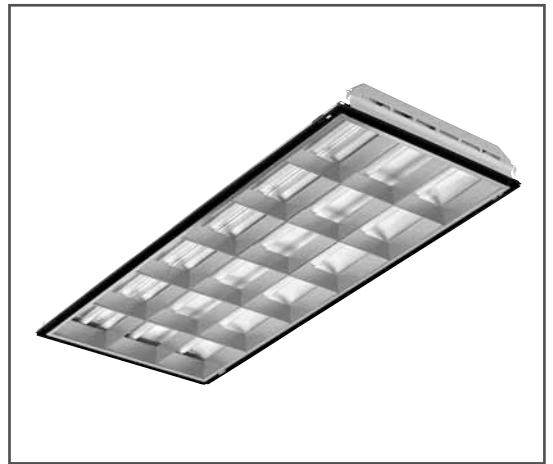

DIMENSIONS

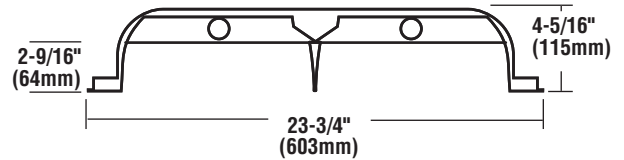

LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LIPGN 18 3 32 FD SSO10 EM UE**

Prefix	Cells	Lamps	Lamp Type	Air Functions	Ballasts	Options	Voltage
LIPGN (Grid)	12 16 18	2 3 4	32 - 32W 48" T8 54 - 54W 45" T5HO 28 - 28W 45" T5	FD - Static AH - Air Handling HR - Heat Removal AHR - Air Supply and Heat Removal	SSOD - T8 Dimming (specify type) SSOL - T8 Low Watt SSOHL - T8 High Power Factor SSOR - T8 Rapid Start SSO10 - T8 <10% THD Instant Start SS5HO - T5 High Output SS5R - T5 Rapid Start SS5D - T5 Dimming (specify type) (For dual ballasts add "2" Example: SSO2) (small can only)	EM - Emergency Pack EMI320DL - Emergency Pack damp location FC1 - 6' 3/8" flex, 3 #18 leads (other types available) APCB - Air Pattern Control Blades WHT - White louver MA/AUX - Master Auxiliary LM - Lamps installed (specify) 2BC - Two Ballast Covers (3 lamp only) PAF - Painted after Fabrication MWA - Aluminum interior reflector JP - Job Packed MWS - Specular Silver Reflector	120 - 120V 277 - 277V 347 - 347V UE - Universal Electronic (120-277V)

NOTE: Ballast cover only designed to accept low profile standard ballasts, dimming ballasts, or emergency packs.

ACCESSORY ORDERING INFORMATION (Accessories are field installed)	
Description	Order Number
Flange Kit - 2x4	FK24

file standard ballasts, dimming ballasts, or emergency packs.

06/08/09

© 2009
LSI INDUSTRIES INC.

Project Name _____ Fixture Type _____

Catalog # _____

