


RX / RXL



DIMENSIONS

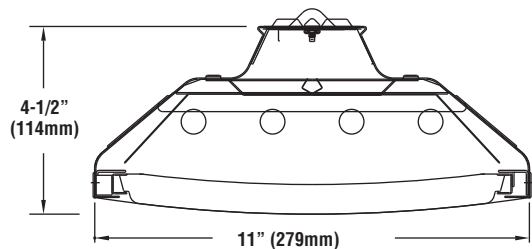

RETAILMAX LOUVERED FLUORESCENT HIGH/LOW BAY

PRODUCT HIGHLIGHTS

- Available with 2, 3 or 4 T8, T5 OR T5HO lamps
- Excellent for large open retail & commercial / industrial spaces
- Low profile - 4.5" x 11.0"
- Available with solid top reflector or with mini slots for up-light
- Quarter turn captive fasteners for easy maintenance
- Optional specular reflector insert provides narrow distribution pattern for narrow aisles or higher mounting heights
- Available in 4-foot & 8-foot lengths
- Spring-loaded rails provide positive retention and easy removal of the louver
- Alignment bumps/indents on end caps ensure straight, uniform rows

CONSTRUCTION - Housing channel crimped along sides for extra rigidity and clamping supports.

ELECTRICAL - All devices UL/CUL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are energy-saving, HPF, electronic (SS). Ballasts and lampholders replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options. Where lamps are included as part of the fixture, lamp CRI and color temperature must be specified.

FINISH - Fixture housing and ends painted after fabrication following treatment with phosphate rust inhibitor. Finish coating of painted reflecting housing surfaces is with white, high reflectance (minimum 92%) polyester powder.

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.



LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LIRXL 2 32 SS010 EM 120**

Luminaire Prefix	Housing Options	Lamps in Cross Section	Lamp Type	Ballasts	Options	Line Voltage
LIRX	U- Uplight	2	32 - 32W T8 48"	SS010 - T8 Instant Start	F - GLR Fusing	120 - 120V
LIRXL (Louvered)	(leave blank for solid top / no uplight)	3	28 - 28W T5 45"	SSOD - T8 Dimming	EM - Emergency Pack (specify type)	277 - 277V
		4	54 - 54W T5HO 45"	SSOL - T8 Low Watt	EMDL - Emergency Pack -Damp Location	480 - 480V
			Note: Add -8T for 8 foot tandem unit	SSOHL - T8 High Power Factor	LM - Lamp Included (specify type)	UE - Universal Electronic (120-277V)
				SSOR - T8 Programmed Rapid Start	PM - Prewired Plug-in Assembly (specify circuitry)	
				SS5R - T5 Programmed Rapid Start	JP - Job Pack	
				SS5HO - T5 High Output Programmed Rapid Start	MWS - Specular Aluminum Reflector Insert	
				SS5DHO - T5 Dimming High Output	OCS - Occupancy Sensor ²	
				(For dual ballasts add "2" Example: SS0102)	WG - Wire Guard	
					CSL - Center Stringer Louver	
					ECL - Egg Crate Louver	
					NYC - 20 Ga. Housing	

FOOTNOTES:

- 1- Specify dimming type and voltage.
- 2- Can only be used with programmed start ballast.

ACCESSORY ORDERING INFORMATION		(Accessories are field installed)	
Description	Order Number	Description	Order Number
Clamp Hanger	CH-20	4' Pendant Mount Kit	PMK4
Chain Hanging Set (36")	CHS	Aircraft Cable	ACK (length)
Additional Accessories available, see Accessories section			