

SURFACE VANDALITES (2' & 4')

VPF

APPLICATION - Surface Vandalites are designed for use in indoor or outdoor environments, where the potential for vandalism or accidental breakage exists. Fixtures can accommodate T5, T8 or Biax lamps. All fixtures are guaranteed against breakage for one year when installed in accordance with our instructions. A specular reflector is optionally available. Two and four foot units are available.

HOUSING - Blanked and die formed from 16 ga crs with white polyester powder coated finish.

SOCKET PLATE & WIREWAY COVER - Die formed from 22 ga crs, white polyester powder coated finish.

SHIELDING - Injection molded clear polycarbonate prismatic diffuser secured with molded lugs one side and tamper proof screws opposite.

BALLAST - Solid state electronic.

SURFACE CONDUIT COLLAR (OPTIONAL)

- Die formed 20 ga crs, white polyester powder coated finish.

LAMPS - T5 or T8 lamps available (by others).

SOCKETS - Polycarbonate locking sockets.


PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.

LISTING - UL Listed to U.S. and Canadian safety standards. Suitable for damp location. IBEW Union made.

FASTENERS - Spanner head tamper-proof screws are shipped standard. Other head types available (see options).



DIMENSIONS

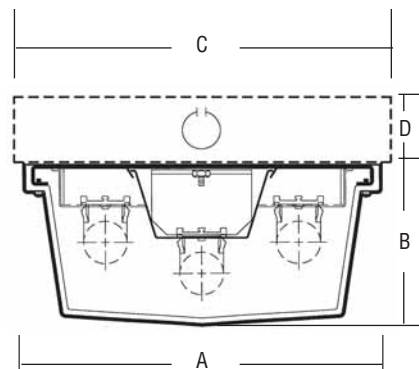

FIXTURE	WIDTH (A)	HEIGHT (B)	LENGTH
VPF2	8-1/4" (210mm)	3-1/2" (89mm)	26-3/16" (665mm)
VPF4	8-1/4" (210mm)	3-1/2" (89mm)	50-3/16" (1275mm)

DIMENSIONS FOR SURFACE CONDUIT COLLAR

FIXTURE	WIDTH (C)	HEIGHT (D)	LENGTH
VPF2	8-3/8" (211mm)	1-1/2" (38mm)	26-1/2" (673mm)
VPF4	8-3/8" (211mm)	1-1/2" (38mm)	50-1/2" (1283mm)

LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LIVPF2 2 17 SS010 EM UE**

Prefix	Lamps	Lamp Type	Ballasts	Options	Voltage
LIVPF2 (2 foot)	1	40BX - 40W Biax 50BX - 50W Biax 55BX - 55W Biax	SSB - Biax Instant Start SSBR - Biax Program Rapid Start SS5 - T5 Instant Start SS5R - T5 Rapid Start SS5D - T5 Dimming (Specify Type) SSO - T8 Instant Start SSOD - T8 Dimming (Specify Type)	CH - Clutch Head CPA - Center Pin Allen Head TORX - Torx Head F - Fusing EM - Emergency Pack SC - Surface Collar GASK - Gasketed Door MS - Maximum Security Retention [VPF-2' - 3 screws per side VPF-4' - 5 screws per side]	120 - 120V 277 - 277V 347 - 347V UE - Universal Electronic (120-277V)
	2 3				
LIVPF4 (4 foot)	1	28 - 28W 45' T5 32 - 32W 48' T8 54 - 54W 45' T5	SSOL - T8 Low Watt SSOHL - T8 High Power Factor SSOR - T8 Rapid Start SSO10 - T8 <10% THD		
	2				
	3				

